



# Wallbox APP Version

3.6kW / 7.2kW / 8.8kW



BS20-APP

## Product Overview

It is an intelligent wall-mounted charging station, which can freely set the charging time and duration, remote control by APP, and can check your charging history documents anytime.



### Intelligent Chip

Automatically fix the non-hardware faults during charging



### Colorful LCD Display

Shows the charging status like charging time, voltage, power consumption etc.




### APP Control

The charging station can be easily controlled by phone, freely start or stop charging, set charging time and current.

# PRODUCT DETAILS



BS20-BC-APP

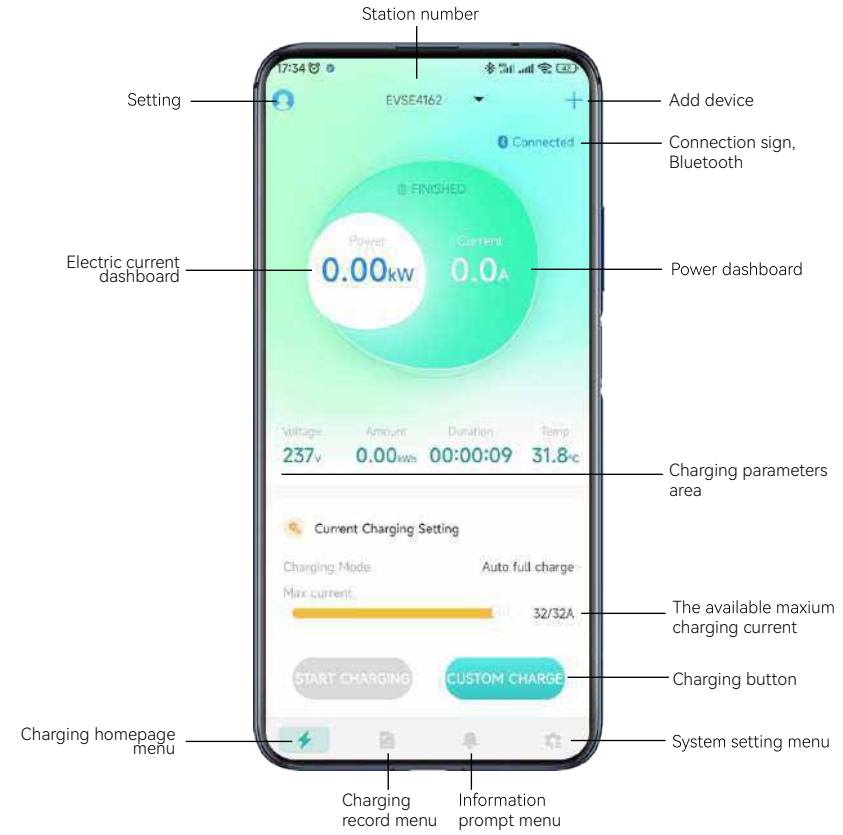

<b>Charging Time Setting</b> Freely set the charging time and duration		<b>Charging History Record</b> Query charging history anytime, anywhere	
<b>Remote Control by APP</b> Start or stop charging via Bluetooth		<b>Firmware Update</b> Make app version upgrades	

## Model BS20-APP

Input & Output	
Input voltage/Output voltage	100~250V AC
Input frequency	47~63Hz
Max. output power	8.8KW(1 Phase)
Max. output current	40A
Charging interface type	SAE J1772

Mechanical	
Dimension (L/W/D)	295/195/65mm
Weight	6KG-8KG

Certificate	
Certificate	CE, FCC, CSA, RoHS

Protection	
Under voltage protection	✓
Over load protection	✓
Short circuit protection	✓
Earth leakage protection	✓
Over-temp protection	✓
Lightning protection	✓

Function	
Ethernet/4G/Bluetooth	Optional
LCD	3.5-inch color display
RCD	Type A
LED Indicator light	✓
Current adjusting	✓

Working Environment	
IP rating	IP66
Environment temperature	-25°C~+55°C
Relative humidity	0~95% non-condensing
Maximum altitude	<2000m
Cooling	Natural air cooling
Standby power consumption	<8W